

SETUP AND MAINTENANCE GUIDE

DE-CHLORINATOR SYSTEM



10" De-chlorinator System
Product # 738315



20" De-chlorinator System
Product # 738320

WHAT'S IN THE BOX?



DE-CHLORINATOR SYSTEM -10"



10" De-chlorinator system includes:

1. Poly Spun Sediment filter – Removes sediment, particulates, dirt, and rust.
2. Coconut Carbon Block filter – Removes chlorine, odor, and other chemicals.
3. Water Source Inlet Tubing, 1/4" (White) – w/ Garden Hose Connector.
4. Filtered Water Outlet Tubing, 1/4" (Blue).
5. Inline shut-off valve.
6. Wall mount bracket.
7. Filter Wrench – for safe removal of filter housing.

DE-CHLORINATOR SYSTEM - 20"



20" De-chlorinator system includes:

1. Poly Spun Sediment filter – Removes sediment, particulates, dirt, and rust.
2. Coconut Carbon Block filter – Removes chlorine, odor, and other chemicals.
3. Water Source Inlet Tubing, 3/8" (White) – w/ Garden Hose Connector.
4. Filtered Water Outlet Tubing, 3/8" (Blue).
5. Inline shut-off valve.
6. Wall mount bracket.
7. Filter Wrench – for safe removal of filter housing.

QUICK OPERATION GUIDE

The following steps will get you set up in just a few minutes. Please read each step carefully. If you have any questions, please refer to our website at www.IdealH2O.net for information and videos on setup & maintenance.

Step 1 – Connect the tubing to the unit:

Insert the BLUE filtered water outlet tubing into connection marked OUT. (fig. A).

Insert the WHITE water source inlet tubing into connection marked IN. (fig. B).




(fig. A)


(fig. B)

Step 2 – Starting up your De-chlorinator System:

Connect the white inlet tube to your water supply and slowly turn on the water source. Once the sediment and carbon filter housings have water in them, turn the water supply fully on.

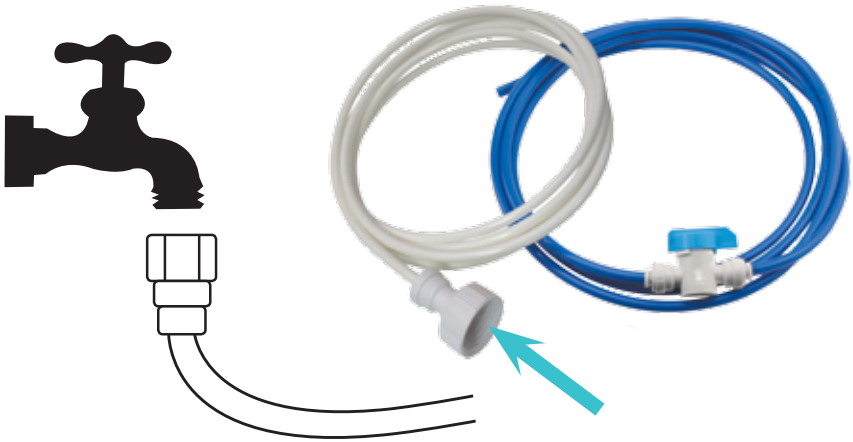

Always run system 30 to 40 minutes before use, especially after changing the filters.

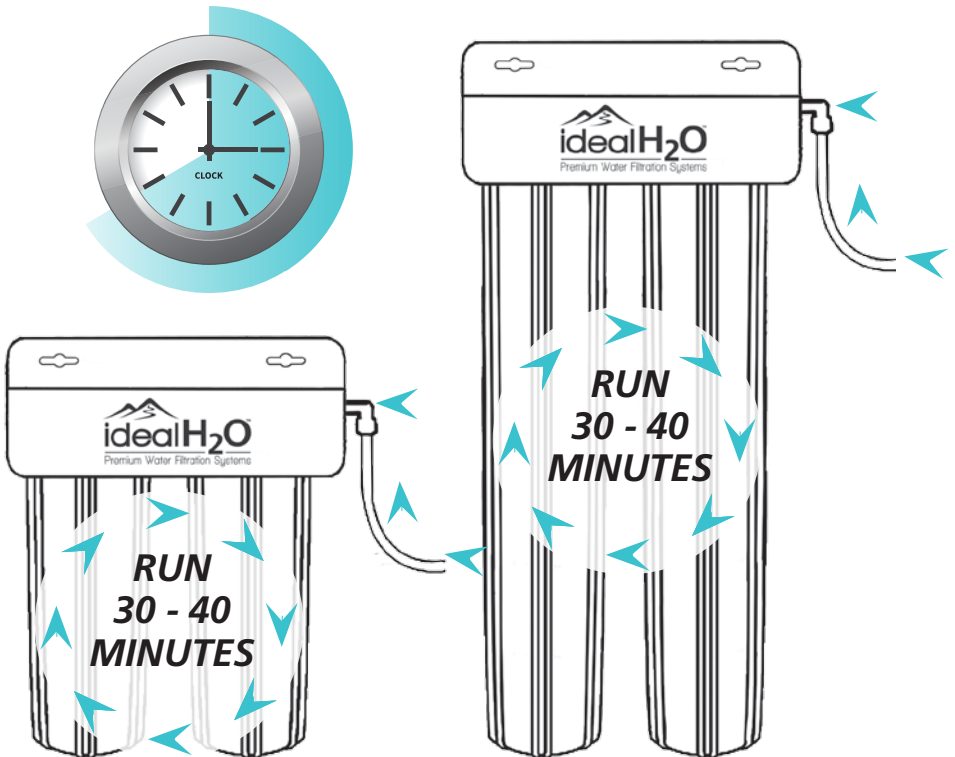

REPLACING THE PRE-FILTERS

Step 1 – Unscrew the filter housing from the system using the filter wrench included with your system.




Step 2 – Replace sediment and/or carbon pre-filters.



Step 3 – Screw the filter housing back onto the De-chlorinator system, firmly hand tightening these. Do not use the wrench to tighten.



REPLACEMENT FILTER INFORMATION

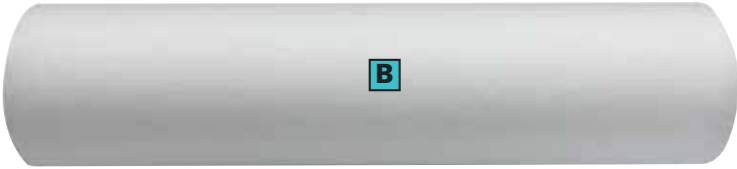

	10" DE-CHLORINATOR REPLACEMENT FILTER	PART NUMBER	FILTER REPLACEMENT TIMELINE
A	Sediment Filter - 10"	738335	6 to 12 months
B	Coconut Carbon Filter - 10"	738330	1,000 - 1,500 gallons of clean water



	20" DE-CHLORINATOR REPLACEMENT FILTER	PART NUMBER	FILTER REPLACEMENT TIMELINE
C	Sediment Filter - 20"	738350	6 to 12 months
D	Coconut Carbon Filter - 20"	738355	1,000 - 1,500 gallons of clean water



For all warranty inquiries, please contact
Ideal H₂O™ at (888) 582-2762.



www.IdealH2O.net

Scan this QR code or visit our website for
how-to videos and other product information.



Exclusively distributed by:

National Garden Wholesale®
Sunlight Supply, Inc.

www.sunlightsupply.com