



INSTRUCTIONS

Model 85

Part #706656

Assembled Size:
4.6'W x 2.5'D x 7.1'H
sun-huts.com



2 PEOPLE
Recommended
for Assembly

BEFORE YOU BEGIN:

Make sure you have a clear, unobstructed area to work in. Lay out all poles and connectors, grouped according to their size and/or shape. **2 PEOPLE are recommended to lift and fit tent body over assembled frame.**

PARTS LIST

5 Floor & Ceiling Poles
54" 1372mm

6 Floor & Ceiling Poles
28" 712mm

8 Wall Poles
41.4" 1052mm



4 Straight Pole Connectors



8 3-way Corner Connectors



6 Equipment Hanger Connectors



2 Window Covers




2 Vent Covers




2 Equipment Straps

1 Removable Mylar Floor Insert



STEP 1


Lay out tent body, unzip all doors, then fully expose rubberized floor tray and smooth it flat. Start frame assembly with floor poles first, inside floor tray as shown.

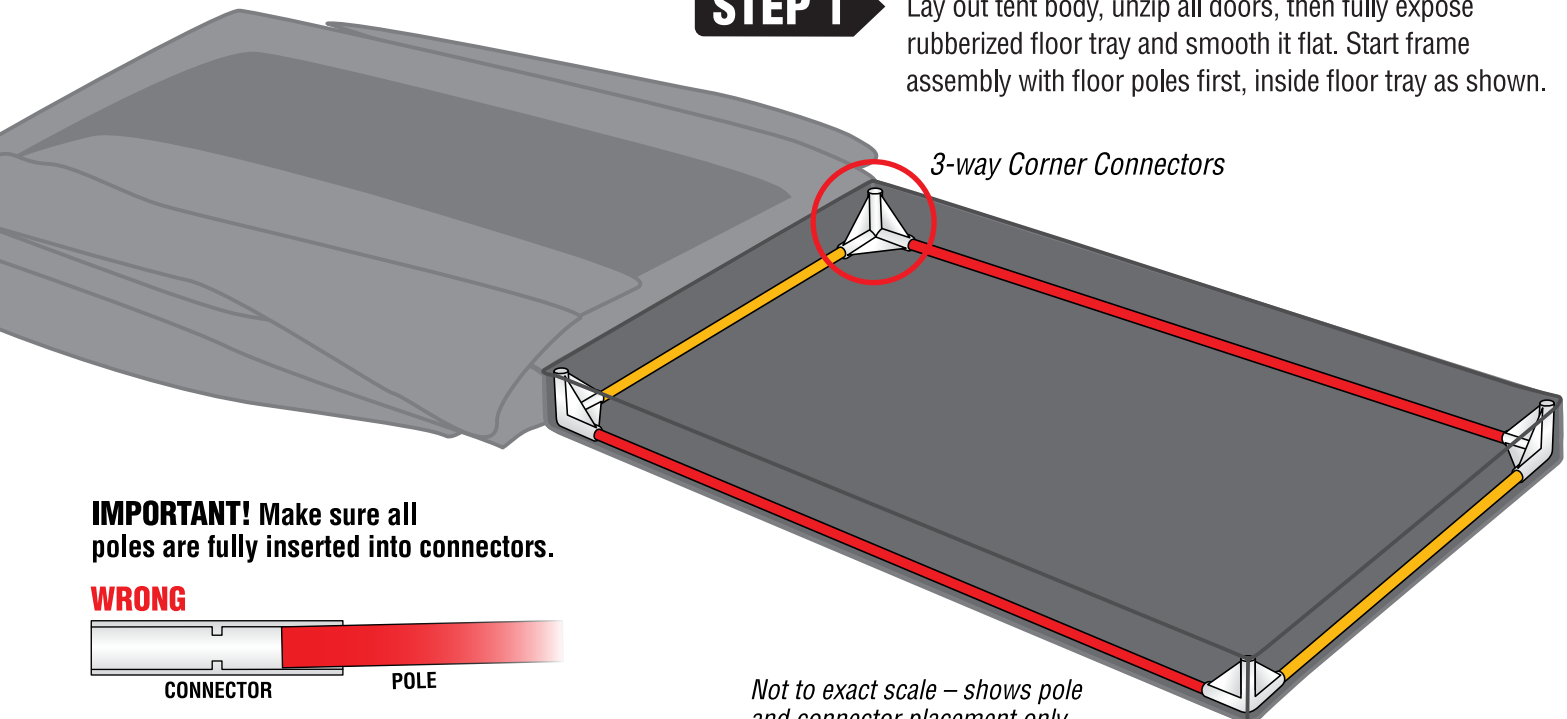

3-way Corner Connectors

IMPORTANT! Make sure all poles are fully inserted into connectors.

WRONG



RIGHT



Not to exact scale – shows pole and connector placement only.



STEP 2 Add Wall Poles and 3-way Corner Connectors at top.



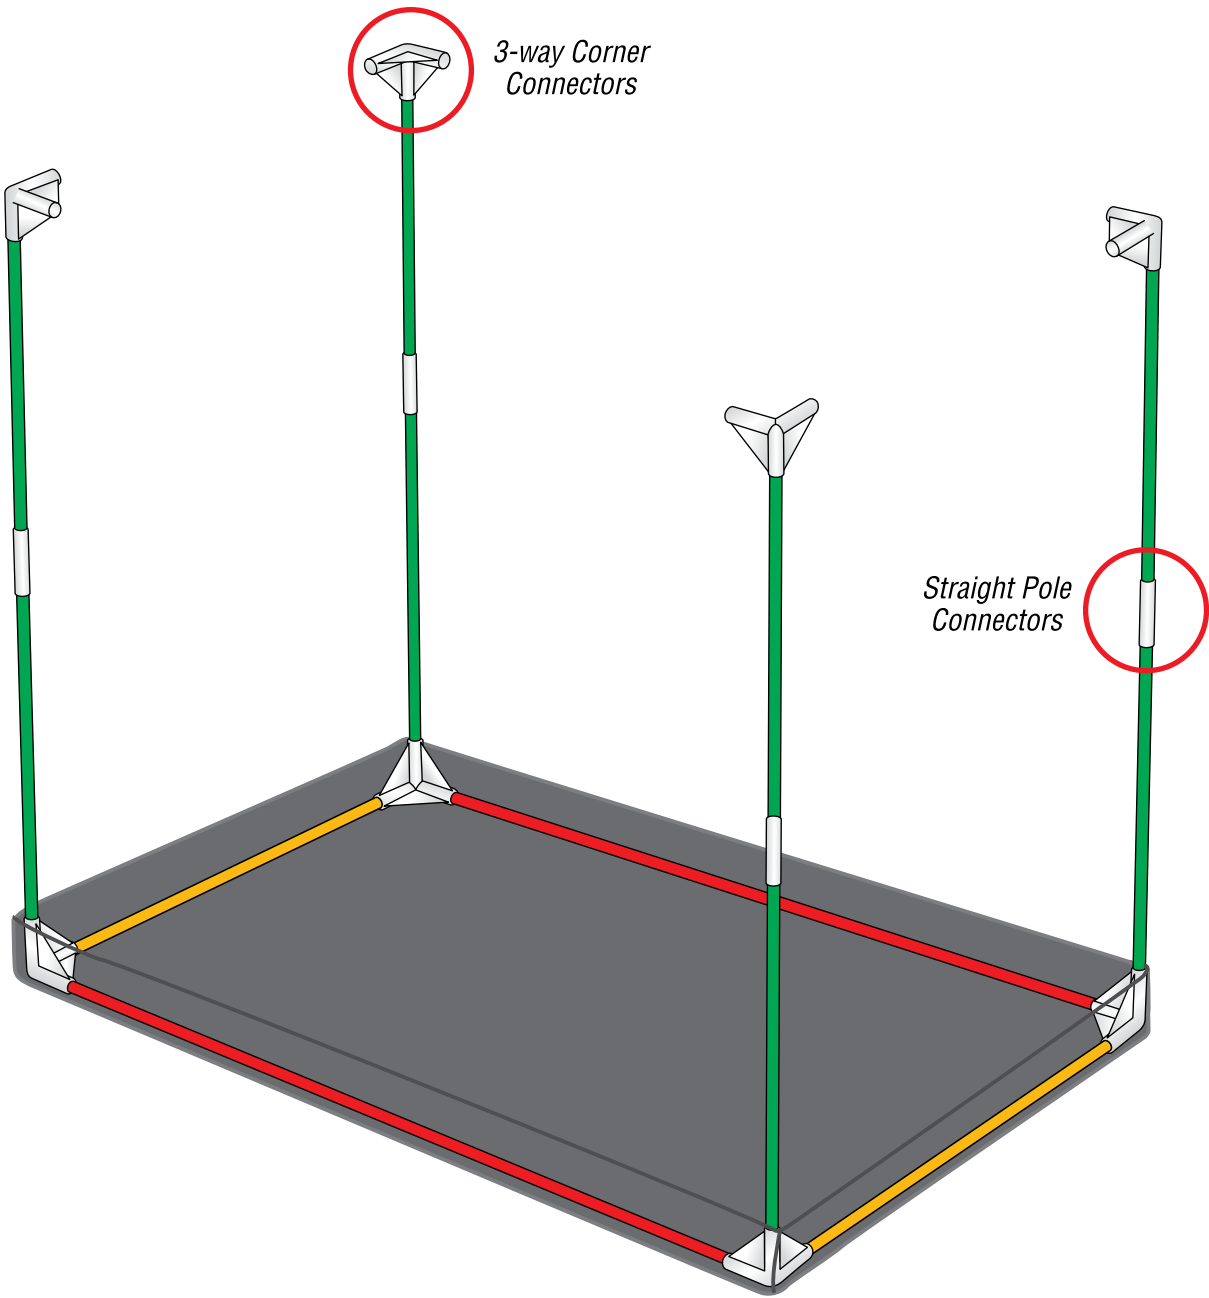


Fig. A

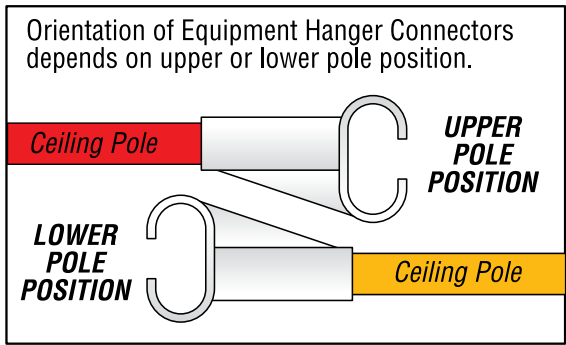


STEP 3

Assemble Ceiling Poles and Equipment Hanger Poles.

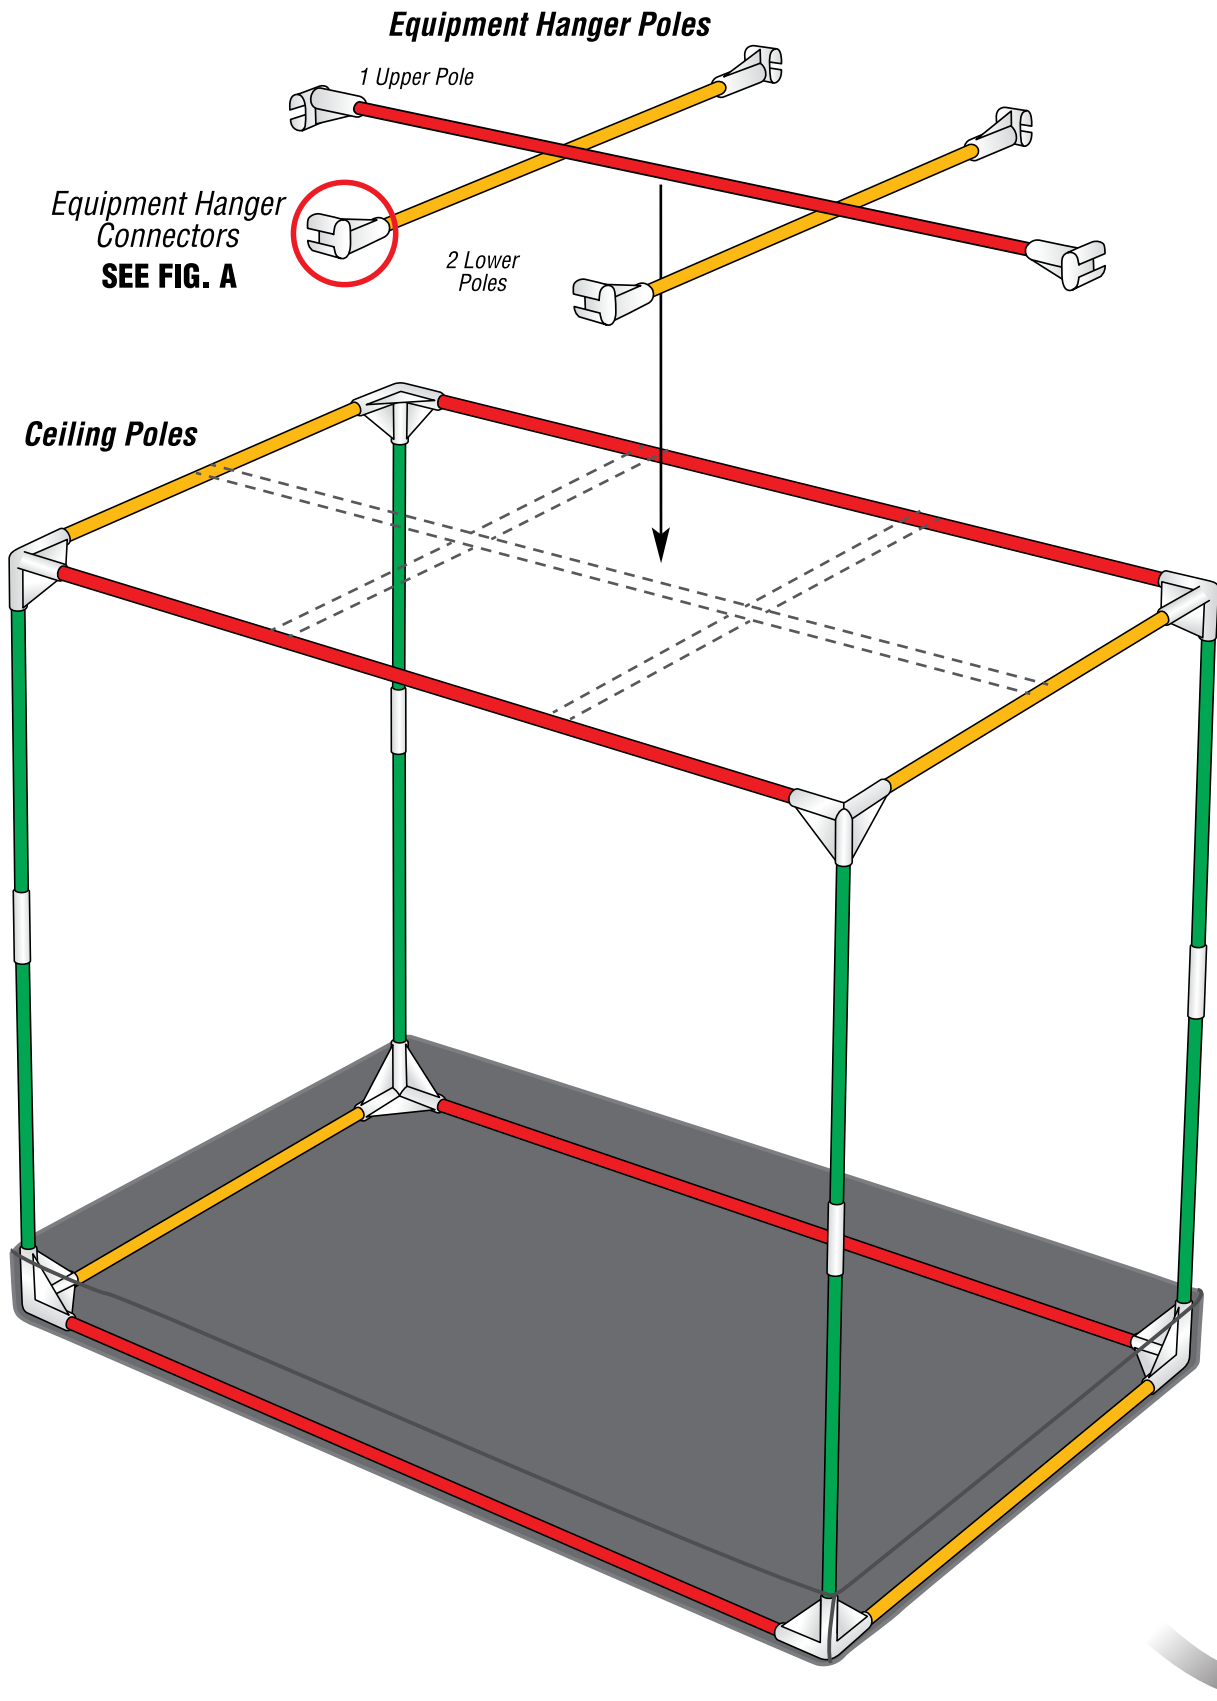



STEP 4

Carefully lift tent body and fit over completely assembled frame (2 people are recommended for this job – 1 person attempting to force the tent body over the frame could cause damage). After tent body is evenly placed, zip doors closed and make final adjustments to fit. Move equipment in and start growing!

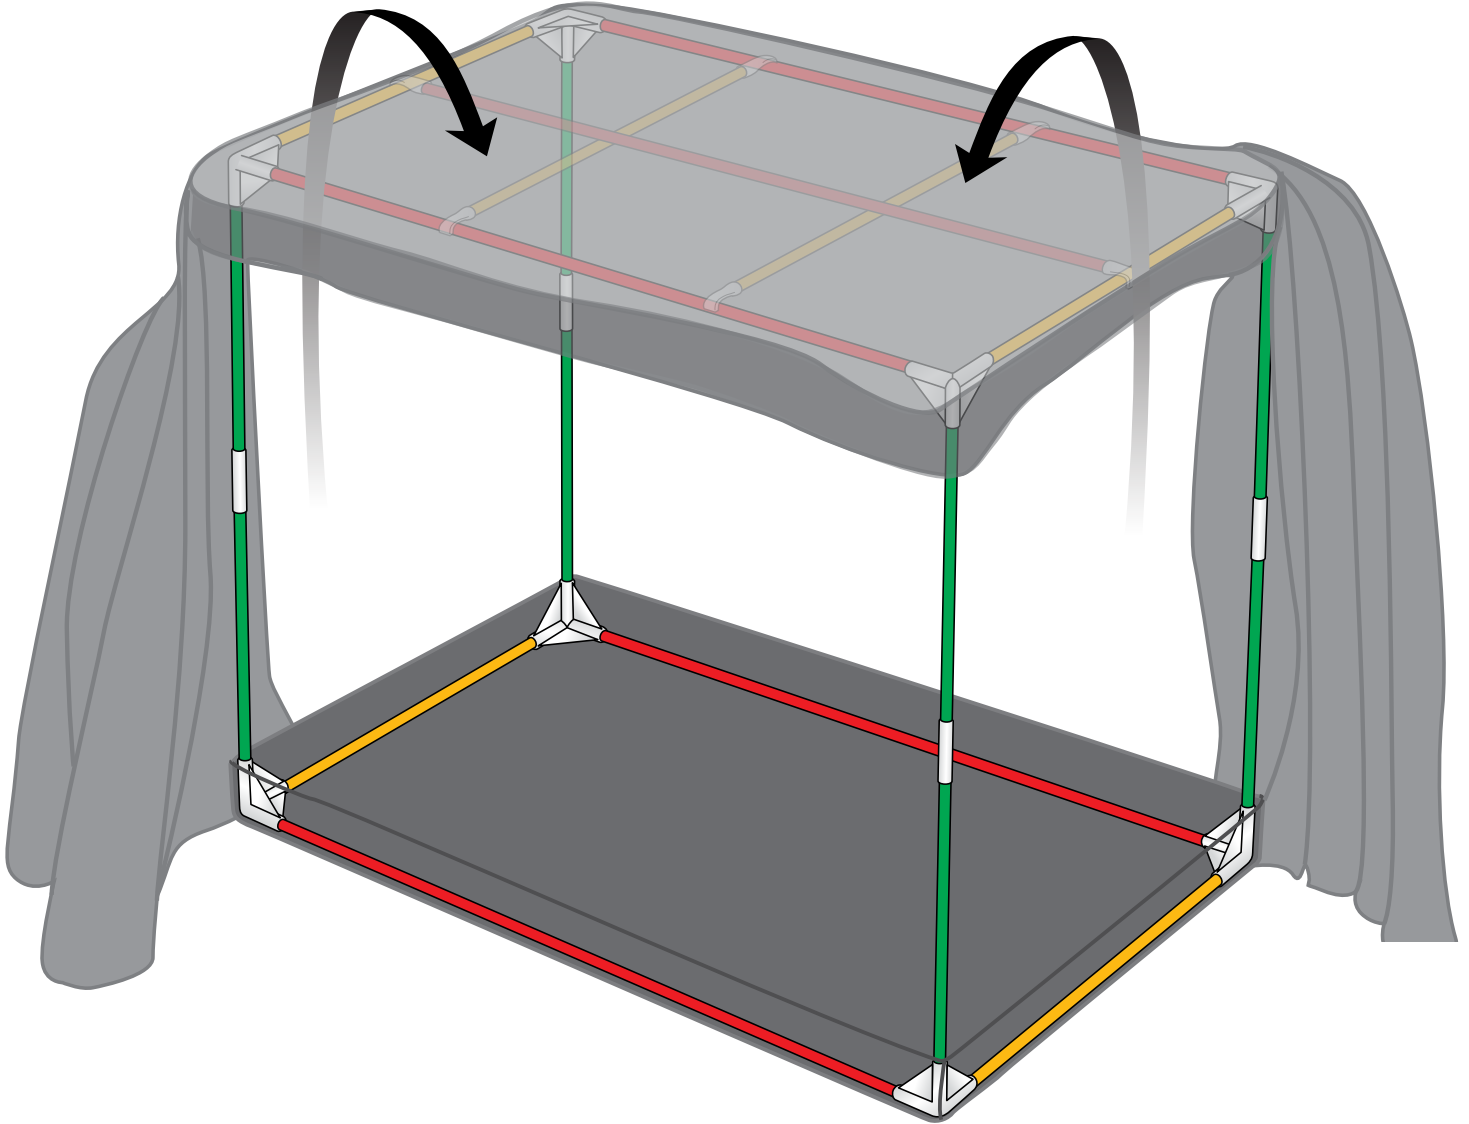


Sonic Welded Irrigation Line Access Ports:

Located 2 per side, these reinforced, light-tight access ports allow reservoir and other plumbing to be placed outside grow tent.




1. Drill hole with bit sized for tubing.



2. Insert tubing through hole.

OPTIONAL ACCESSORIES

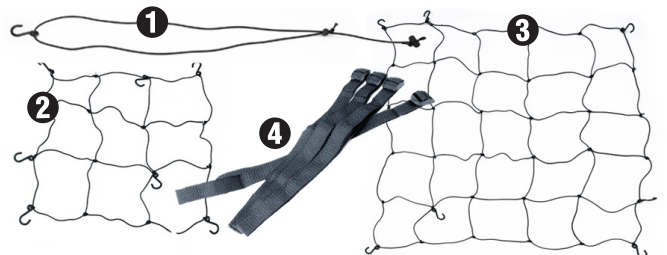

1. #706590 Elastic Support (4/pack)
2. #706592 2' x 3.33' Elastic Trellis (1/pack)
3. #706594 4' x 5' Elastic Trellis (1/pack)
4. #706596 Support Strap (2/pack)
5. #706598 16mm S Hook (5/pack)
6. #706600 22mm S Hook (5/pack)

FRAME ASSEMBLY DIAGRAM

Not to exact scale – to show pole and connector placement only.



8 41.4" Wall Poles
1052mm

5 54" Floor & Ceiling Poles
1372mm

6 28" Floor & Ceiling Poles
712mm

3-way Corner
Connectors

